

ACCUD

ACCURATE MEASUREMENT




See full product range at: accud.com.au

Dial Bore Gauge

Series 251



251-160-11

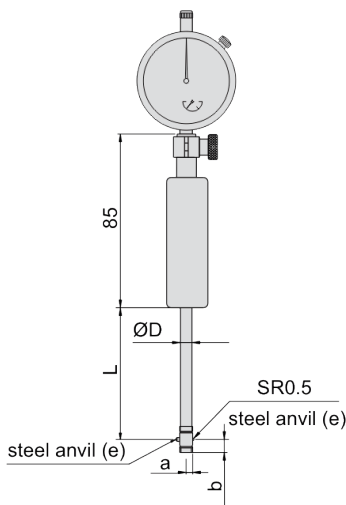

Range: 6-10mm

© Copyright M Gamer Pty. Ltd. 2023

Features

- Wooden handle isolate heat conduction
- Optional accessory: series 531 setting rings

Specifications

Part No	Range	Indicator	Tips	Gasket	Accuracy	Repeatability	a	b	c	Diameter1	Diameter2	e	L
AC-251-010-11	6-10mm	Dial Indicator Range:3mm Graduation: 0.01mm	9pcs	2pcs	±0.012mm	3µm	3.6	5.7	-	-	4.5	SR1	48
AC-251-018-11	10-18mm	Dial Indicator Range:3mm Graduation: 0.01mm	9pcs	2pcs	±0.012mm	3µm	5.6	7.8	-	-	6	SR1	105
AC-251-035-11	18-35mm	Dial Indicator Range:10mm Graduation: 0.01mm	9pcs	2pcs	±0.015mm	3µm	12.2	6.4	-	12.7	9	SR1	141
AC-251-060-11	35-60mm	Dial Indicator Range:10mm Graduation: 0.01mm	6pcs	4pcs	±0.018mm	3µm	26	9	27	13	12.8	SR2	141
AC-251-100-11	50-100mm	Dial Indicator Range:10mm Graduation: 0.01mm	11pcs	4pcs	±0.018mm	3µm	26	9	35	13	12.8	SR2	141
AC-251-160-11	50-160mm	Dial Indicator Range:10mm Graduation: 0.01mm	12pcs	4pcs	±0.018mm	3µm	26	9	35	13	12.8	SR2	141
AC-251-160-12	100-160mm	Dial Indicator Range:10mm Graduation: 0.01mm	12pcs	4pcs	±0.018mm	3µm	26	9	35	13	12.8	SR2	141

Part No	Range	Indicator	Tips	Gasket	Accuracy	Repeatability	a	b	c	Diameter1	Diameter2	e	L
AC-251-250-11	160-250mm	Dial Indicator Range:10mm Graduation: 0.01mm	5pcs	5pcs	±0.018mm	3µm	56.5	13	74.5	15	14.5	SR3.5	400
AC-251-450-11	250-450mm	Dial Indicator Range:10mm Graduation: 0.01mm	5pcs	5pcs	±0.018mm	3µm	86.5	15	101.5	15	14.5	SR3.5	400