# ACCUD

## ACCURATE MEASUREMENT





See full product range at: accud.com.au

# Digital Bottle Cap Torque Meter

Series TTM



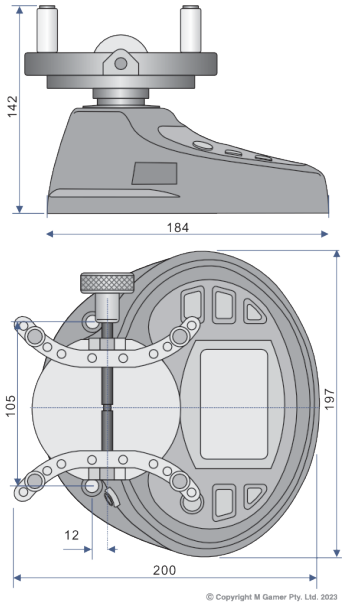


## Features

Test the open and tighten torque of bottle cap
Peak, preset and real-time working mode
Unit: N.m, N.cm, kgf.cm, lbf.cm, lbf.in
Memory: 1000
Power off automatically
With software, can show the torque graph

## Specifications

| Part No | Specification |
|---|---|
| AC-TTM10 | Range: 0.5-10N.m<br>Accuracy: ±0.5%<br>Resolution: 0.001N.m<br>Open size: Ø19.5-190mm<br>Output: USB and RS232<br>Power: rechargeable battery<br>Weight: 2.5kg<br><br>Included accessories<br>Main unit: 1pc<br>Charger: 1pc<br>Software with cable: 1pc<br><br>Optional accessories<br>Wireless printer: PR100 |
| AC-TTM2 | Range: 0.1-2N.m<br>Accuracy: ±0.5%<br>Resolution: 0.0002N.m<br>Open size: Ø19.5-190mm<br>Output: USB and RS232<br>Power: rechargeable battery<br>Weight: 2.5kg<br><br>Included accessories<br>Main unit: 1pc<br>Charger: 1pc<br>Software with cable: 1pc<br><br>Optional accessories<br>Wireless printer: PR100 |

© 2026 M Gamer Pty Ltd

| Part No | Specification |
| --- | --- |
| AC-TTM20 | Range: 1-20N.m<br>Accuracy: ±0.5%<br>Resolution: 0.002N.m<br>Open size: Ø19.5-190mm<br>Output: USB and RS232<br>Power: rechargeable battery<br>Weight: 2.5kg<br><br>Included accessories<br>Main unit: 1pc<br>Charger: 1pc<br>Software with cable: 1pc<br><br>Optional accessories<br>Wireless printer: PR100 |
| AC-TTM5 | Range: 0.25-5N.m<br>Accuracy: ±0.5%<br>Resolution: 0.0005N.m<br>Open size: Ø19.5-190mm<br>Output: USB and RS232<br>Power: rechargeable battery<br>Weight: 2.5kg<br><br>Included accessories<br>Main unit: 1pc<br>Charger: 1pc<br>Software with cable: 1pc<br><br>Optional accessories<br>Wireless printer: PR100 |

© 2026 M Gamer Pty Ltd